

GX39

FTTH Fiber Optic Fusion Splicer



Product Feature and Function

- Fast-splicing 9s Fast-heating 20s
- Electrode Life: 4000 times
- Average Loss 0.01dB
- 5200mAh Battery Capacity
- Circular Welding 350 times
- Saved 10000 groups Splicing Results.
100 sets of Images
- 3.5 Inch 800*480 HD LCD Screen
- 300X(X-axis or Y-axis); 150X(X-axis or Y-axis)
- Combined with the Real Time Discharge Processing for Low Loss Splice
- USB Interface; Convenient for Data Download and Software Update
- Compact, Lightweight & Faster

FEATURE:



Oven with Removable SOC Clamps




Fast-splicing 9S
Fast-heating 20S




Special 3-in-1 Fiber Holder




Integrated Cooling Tray



Durable Ceramic Fiber Pressure Heads



Ceramic V-groove Design

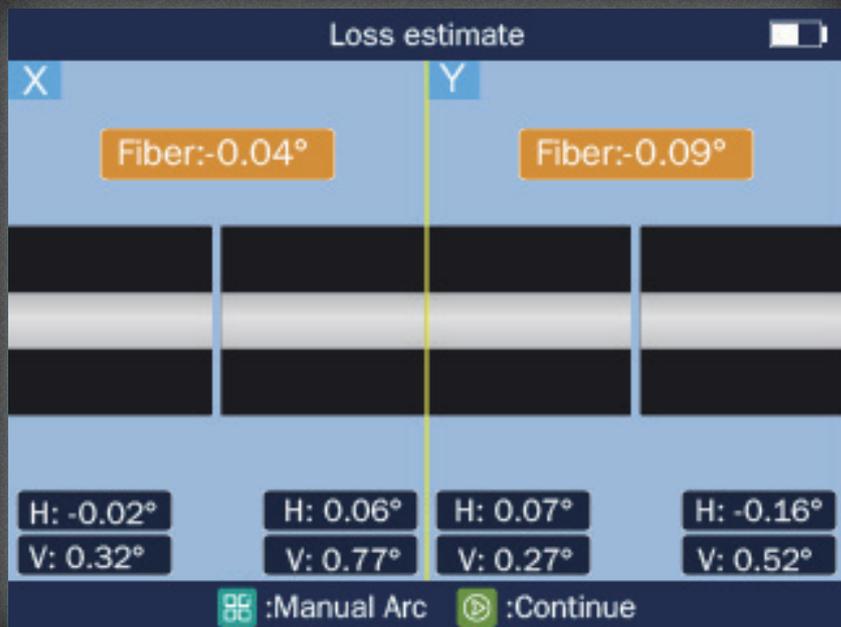

9S
Fast-splicing



20S
Fast-heating



4000 Times
Electrode Life

All-in-one Fiber Holder



Bare Fiber



0.9mm Pigtail Fiber



3.0mm Jump Fiber



FTTH Flat Fiber

SPECIFICATION:

Type	GX39
Fiber Type	SM(G.652 &G.657) / MM (G.651) / DS(G.653) / NZDS (G.655)
Actual Splicing Loss	0.02dB(SM) 0.01dB(MM) 0.04dB(DS/NZDS)
Control Technique	Real-time control and correction of welding arc; Self-adaptation within working environment; Self-adaptive electrode oxidation
Return Loss	Better than 60dB
Tube Typical Splicing Time	9S(Standard SM)
Tube Typical Heating Time	20S(Heating time can be set; Heating temperature can be adjusted)
Fiber Aligning Method	Meticulous; Core; Clad; Manual
Fiber Diameter	Clad Diameter is 80 ~ 150μm; Coating 100 ~ 1000μm
Cutting Length	Coating layer < 250μm: 8 ~ 16 mm; Coating 250 ~ 1000μm: 16mm
Heat-shrinkable Sleeve	60mm / 40mm and a series of thermal sleeves
Tension Test	Standard 2N(can choose)
Fiber Clamp	Suitable for Bare fiber; Tail fiber; Jumper wire; Leather wire
Fiber Image Magnification	300X(X-axis or Y-axis); 150X(X-axis or Y-axis)
Display	3.5Inch TFT color LCD, can be flipped convenient bidirectional operation
External Port	USB 2.0 interface, convenient for data download, using U disk upgrade software
Splicing Program	100(User Mode); 53(Factory Mode)
Heating Program	40 (User Mode); 11 (Factory Mode)
Fusion Splicing Record	Saved 10000 groups splicing results.100 sets of latest Images
Internal battery	Lithium battery 12.5V power supply (10.8V storage), independent charger, charging time ≤3.5,heating time no less than 350 times(Typical)
Power Supply	Power supply connector, external adapter (Import AC: AC100~240V, 50/60Hz, 0~1.5A, Export DC: DC13.5v/4.8A)
Working environment	Temp: -10~50°C; Hum: 0~95%RH Elevation: 0~5000M; Resist the maximum wind speed: ≤ 15m/s
High-brightness lights	Convenient for placing the fiber at night
Dimension	122mm×148mm×130mm
Weight	1.44kg (Without Battery); 1.77kg (With Battery)

PACKING LIST:



Fusion Splicer



Fiber Optic Cleaver



3-hole Miller Stripper



Fiber Optic Cleaning Platform



Splice Protector Sleeves



Fiber Optic flat cable Stripper



Power Charger



(Standard Configuration) Carry Case



(Selective Configuration)
Multi-function Carry Bag

HEAD OFFICE

KomShine Technologies Limited

CONTACT US

Add: 2F Bldg. D Qinheng Tech. Pk. Nanjing, JS, 210001, China

TEL: +86 (025) 66047688

www.KomShine.com

ventas@komshine.com

* KomShine reserves the right to improve, enhance, or modify the features and specifications of KomShine products without prior notification.

* Company and product names appearing in this catalogue are registered marks or trademarks of respective companies.

* This catalogue is printed using environmentally friendly paper and ink.