

KPN-35

PON power meter



Product Characteristics

- The meter test threshold can be set through the management software
- Automatic shutdown (can be cancelled)
- Users can test 1490 in the PON network at the same time nm, 1550nm, 1310nm three wavelengths
- Simultaneously measure and display different PON architectures, data and video signals
- The instrument provides five sets of thresholds to choose from, with pass, warning, and fail modes
- Manual calibration




One-button
start



Automatic
shut-down



Large-capacity
data storage



High-definition
color display



Plug
and play



3 wavelength
detection




Silicone
protective shell



USB connection
to computer

High-definition color display

Rich colors,
high-definition display pictures,
giving you a fun visual experience

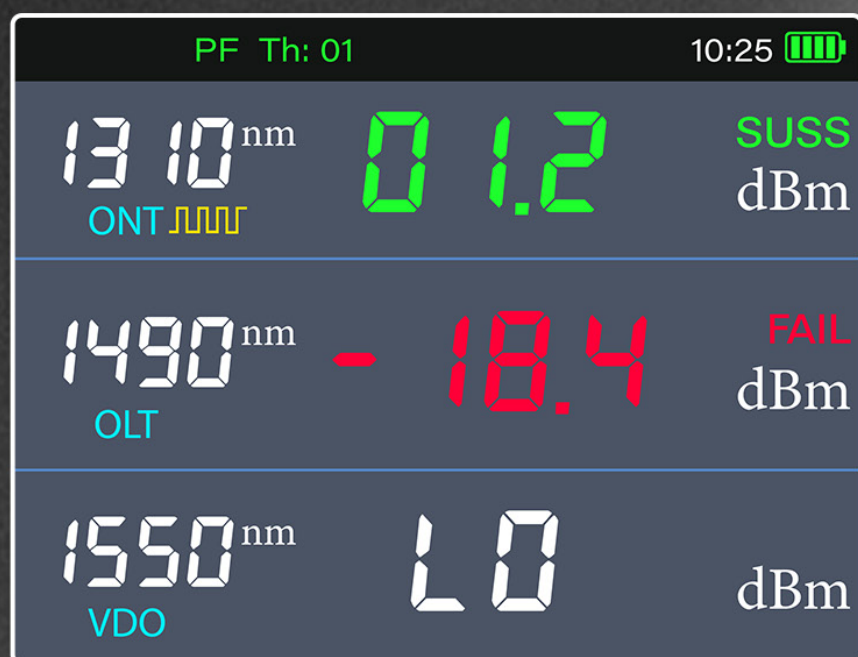

Features



Anti-fall



Compact



Bracket design




Split protective sleeve

Products Specification

Model	PON		
Measuring wavelength	1310nm	1490nm	1550nm
Sensor Type	InGaAS		
Linearity	$\pm 0.2\text{dB}@1550\text{nm} \geq -40\text{dBm}$		
Isolation With filtering function	1490nm Wavelength > 40dB	1310nm Wavelength > 40dB	1310nm Wavelength > 40dB
	1550nm Wavelength > 40dB	1550nm Wavelength > 30dB	1490nm Wavelength > 30dB
Testing range	-40dBm~+16dBm	-50dBm~+16dBm	-50dBm~+23dBm
Insertion loss in penetration mode (dB)	Less than 1.5dB		
Measurable optical frequency broadband	1260~1360	1480~1500	1539~1565
Inherent uncertainty	0.5dB \pm 1nW@1550nm		
Display resolution	0.01dB		
Threshold setting	5 groups are set by the host computer		
Calibration wavelength	1310nm/1490nm/1550nm		
Data storage	900 groups		
Operating temperature	-10℃~+50℃		
Relative humidity	0%~95%RH		
Interface type	SC/UPC(Other types can be customized)		
Power supply	3 AA batteries		
Standard packaging	Description		
KPN-35	KPN-35 main machine, USB line, warranty card, user guide, package		

FTTH network

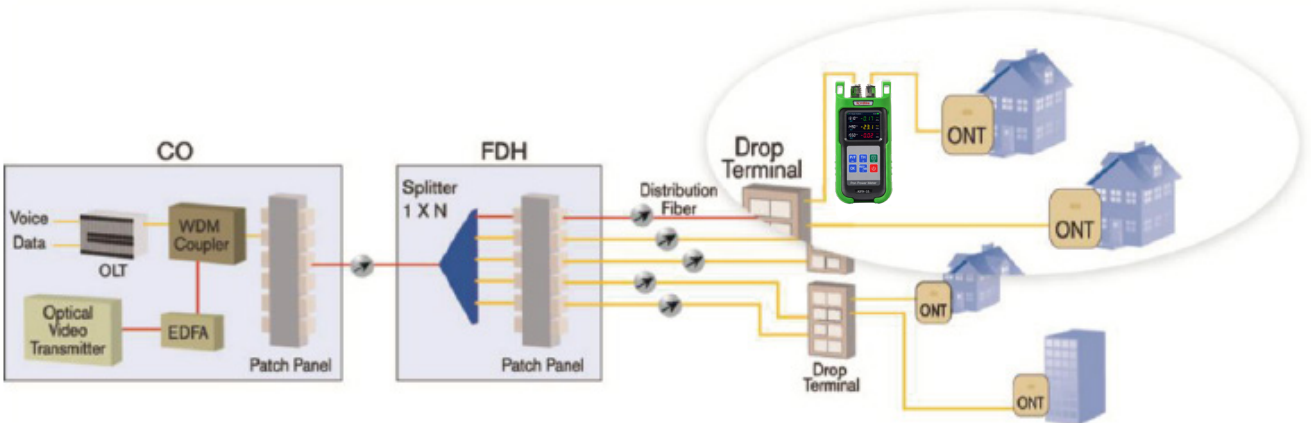

Product display



HEAD OFFICE

KomShine Technologies Limited

CONTACT US

Add: 2F Bldg. D Qinheng Tech. Pk. Nanjing, JS, 210001, China

TEL: +86 25 66047688

Web: www.komshine.com

Mail: info@komshine.com

* Komshine reserves the right to improve, enhance, or modify the features and specifications of KomShine products without prior notification.

* Company and product names appearing in this catalogue are registered marks or trademarks of respective companies.

* This catalogue is printed using environmentally friendly paper and ink.